

Model 299

Drip Pan Elbow



KUNKLE

Features


The above illustration shows a discharge elbow and drip pan unit attached to a safety valve with female NPT outlet.

For safety valves with flanged outlets – 2-inch to 4-inch – use companion flange, short nipple and drip pan elbow, all same size as valve outlet. 6- and 8-inch elbows have integral 125# ANSI B16.1 Flange.


Important - Length of discharge piping must be kept to a minimum. For design considerations see articles: "Steam Flow Through Safety Valve Vent Pipes" by H.E. Brandmaier and M.E. Knebel (Dec. 1975) and "Analysis of Power Plant Safety and Relief Valve Vent Stacks" by G.S. Liao (Nov. 1974) available through ASME Publications.

Applications

Recommended installation on outlet/discharge pipe for safety valves. Used on steam service.

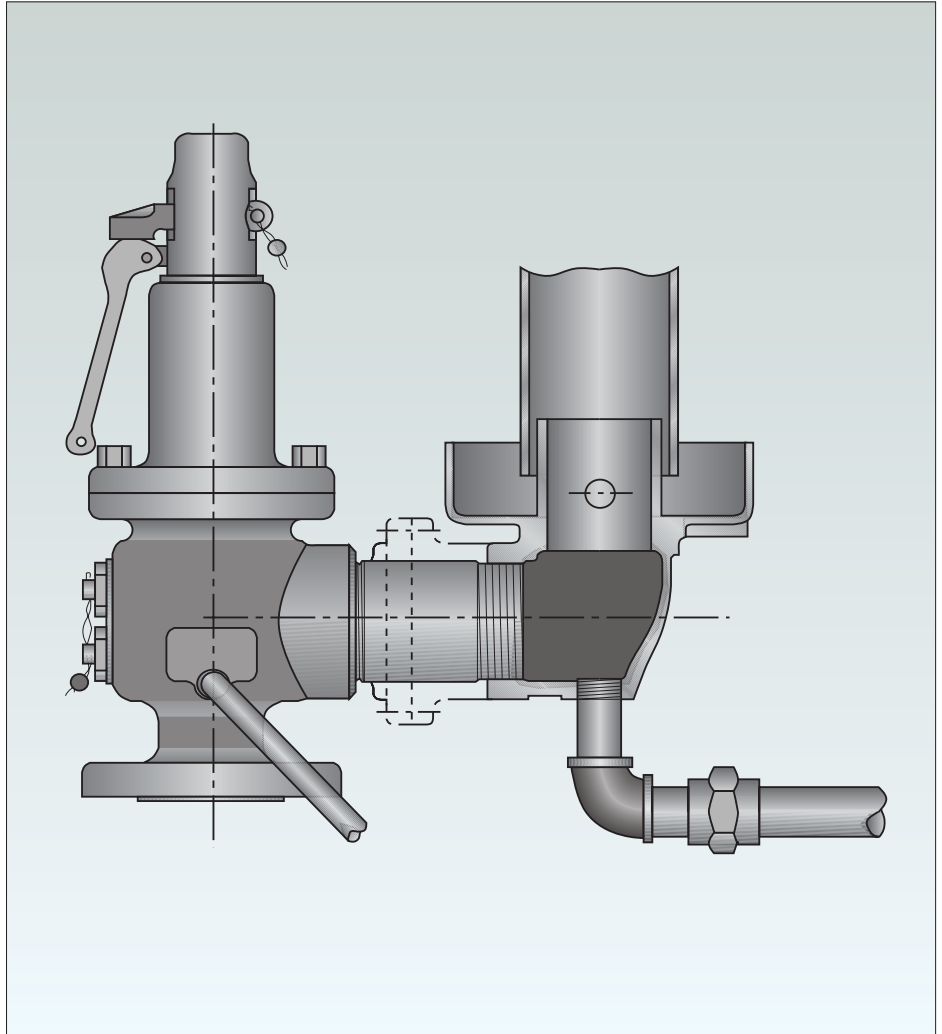

Model 299

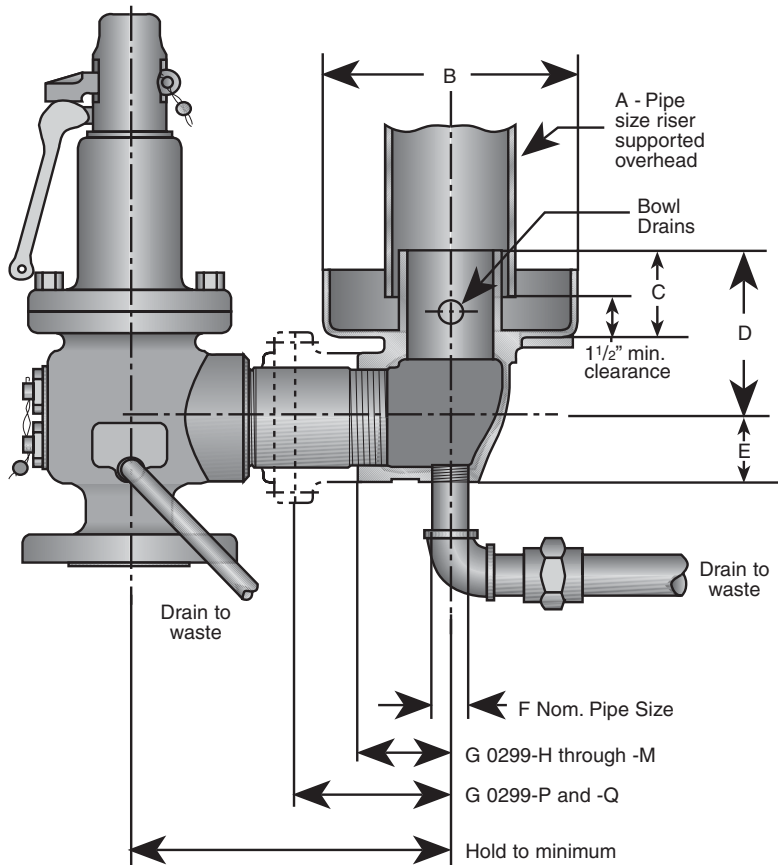

Dimensions, in

Model	Size ¹	Dimensions, in							Weight (lb)	
		A	B	C	D	E	F	G		
0299-H	2"	2"	3	6 1/4	2 3/8	3 5/8	1 5/8	1/2 NPT	2 1/4	7 1/2
0299-J	2 1/2"	2 1/2"	3 1/2 or 4	7 3/8	3	4 5/16	1 15/16	3/4 NPT	2 11/16	14
0299-K	3"	3"	4	8	3 1/2	4 7/8	2 5/16	3/4 NPT	3 1/8	19
0299-M	4"	4"	6	9 5/8	4 1/2	5 3/4	2 7/8	3/4 NPT	3 3/4	32
0299-P	6"	6"	8	12 3/4	6 5/8	7 9/16	4 3/16	3/4 NPT	8	83
0299-Q	8"	8"	10	16 1/2	7 1/2	9 9/16	5 3/8	1 NPT	10 3/4	158

Note

1. Safety valve outlet and drip pan elbow size.

Facility Phone: 828-669-3700

tyco / Valves & Controls

www.kunklevalve.com

The data presented in this bulletin is for general information only. Manufacturer is not responsible for acceptability of these products in relation to system requirements. Patents and Patents Pending in U.S. and foreign countries. All rights reserved. Printed in U.S.A. Tyco reserves the right to change product design and specifications without notice. © Copyright 2002.